BELT_14_PRECRUSH

Company:	
User:	
Result file:	C:\CamsizerXT\CAMDAT\BELT_14_PRECRUSH\BELT_14_PRECRUSH053.rdf
Task file:	C:\CamsizerXT\CAMSYS\BELT_14_PRECRUSH.afg
Time:	3/5/2015 , 16:05 , duration 7 min 22 s at 0.5 % covered area, image rate 1:1 , with X-Fall, gap width = 7.0 mm
Particle model:	xc_min
No. of particles:	CCD-B = 3385639 , CCD-Z = 18551
Velocity adaption:	no
Fitting:	no
Material:	

ASTM(+)	No(-)	retained [%]	passing [%]	SPHT3	Symm3	b/l3	PDN
> #16		12.5	100.0	0.777	0.882	0.715	1058
#20	#16	14.5	87.5	0.803	0.886	0.707	3334
#30	#20	17.2	73.0	0.833	0.889	0.720	10857
#40	#30	14.5	55.8	0.855	0.890	0.723	25926
#50	#40	13.5	41.3	0.873	0.892	0.725	69784
#60	#50	7.2	27.8	0.887	0.895	0.727	81154
#70	#60	6.3	20.6	0.899	0.900	0.729	116726
#140	#70	13.8	14.3	0.891	0.901	0.716	765815
PAN	#140	0.5	0.5	0.813	0.894	0.631	8117437

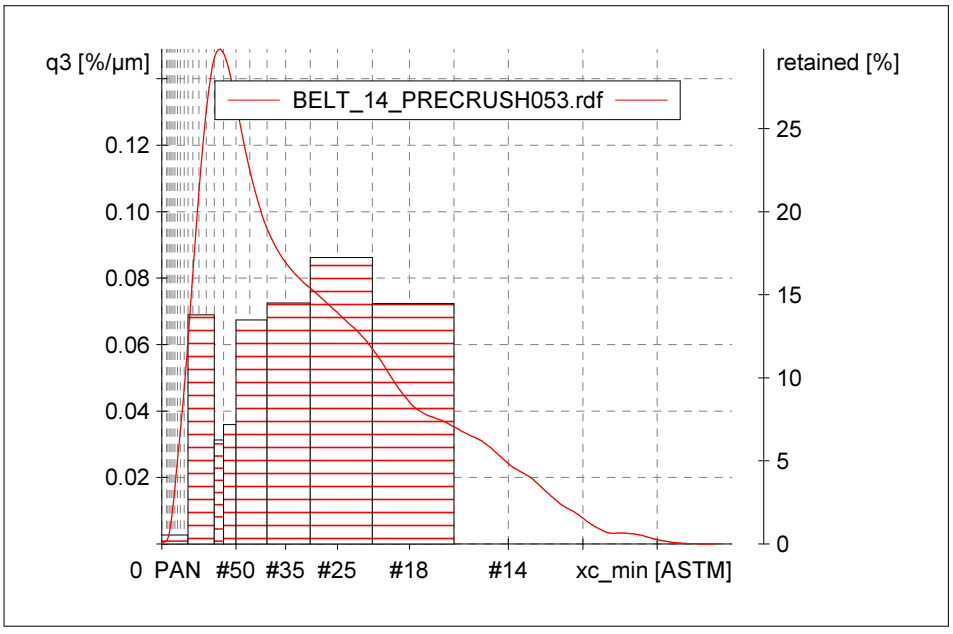

Characteristics

Q3 [%]	x [µm]
10.0	187.3
50.0	525.5
90.0	1260.4
SPAN3 =	2.042
U3 =	3.494
Mv3(x) =	627.1 µm
Sigma3(x) =	411.3 µm

Mean value SPHT3 = 0.840
Mean value Symm3 = 0.891
Mean value b/l3 = 0.704
Mean value RDNS_C3 = 0.380
Mean value SPHT_K3 = 0.613

User

Copyright © 2014 Retsch Technology GmbH
Retsch Technology , Retsch Allee 1-5 , Phone: +[49] (0)2104-2333-300 Fax: +[49] (0)2104-2333-399 E-mail: technology@retsch.com