


A35_05_7K

Company:
 User:
 Result file: C:\CamsizerXT\CAMDAT\A35_05_7K\A35_05_7K053.rdf
 Task file: C:\CamsizerXT\CAMSYS\A35_05_7K.afg
 Time: 8/3/2015 , 11:25 , duration 35 min 45 s at 0.5 % covered area, image rate 1:1 , with X-Fall, gap width = 7.0 mm

Particle model: xc_min
 No. of particles: CCD-B = 104134359 , CCD-Z = 1228659
 Velocity adaption: no
 Fitting: no

Material:

ASTM(+)	No(-)	retained [%]	passing [%]	SPHT3	Symm3	b/l3	PDN
> #16		0.9	100.0	0.379	0.763	0.580	22
#20	#16	0.4	99.1	0.626	0.837	0.687	55
#30	#20	1.1	98.7	0.663	0.834	0.697	465
#40	#30	2.4	97.6	0.722	0.833	0.709	2920
#50	#40	4.6	95.2	0.771	0.833	0.706	14626
#60	#50	4.8	90.6	0.838	0.858	0.722	33841
#70	#60	13.5	85.8	0.900	0.893	0.747	158649
#140	#70	57.9	72.3	0.909	0.906	0.733	2185179
PAN	#140	14.4	14.4	0.877	0.910	0.712	240863082

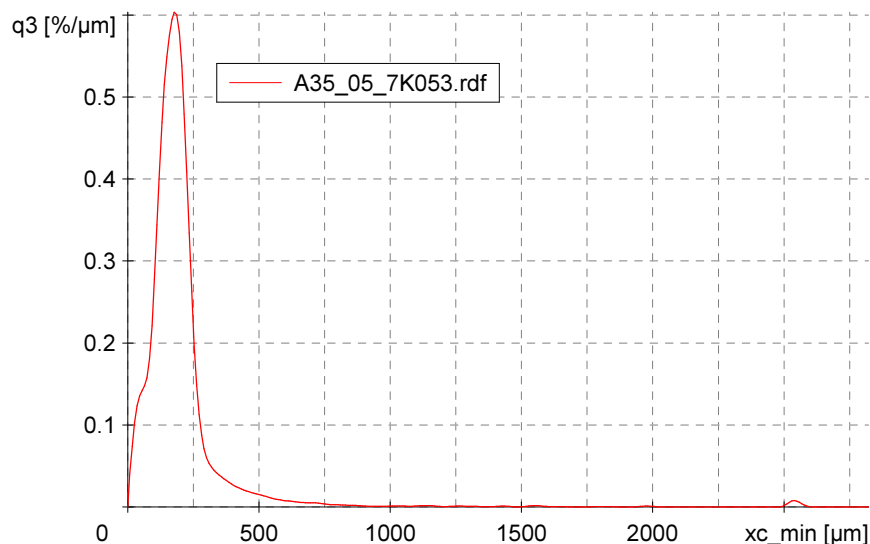

Characteristics

Q3 [%]	x [μm]
10.0	84.1
50.0	175.3
90.0	289.0
SPAN3 =	1.169
U3 =	2.272
Mv3(x) =	205.0 μm
Sigma3(x) =	213.5 μm

Mean value SPHT3 = 0.873
 Mean value Symm3 = 0.893
 Mean value b/l3 = 0.710
 Mean value RDNS_C3 = 0.514
 Mean value SPHT_K3 = 0.621

User