


B64_1_PRECRUSH

Company:
 User:
 Result file: C:\CamsizerXT\CAMDAT\B64_1_PRECRUSH\B64_1_PRECRUSH102.rdf
 Task file: C:\CamsizerXT\CAMSYS\B64_1_PRECRUSH.afg
 Time: 6/9/2015 , 9:10 , duration 8 min 58 s at 0.5 % covered area, image rate 1:1 , with X-Fall, gap width = 7.0 mm

Particle model: xc_min
 No. of particles: CCD-B = 13443103 , CCD-Z = 182981
 Velocity adaption: no
 Fitting: no

Material:

ASTM(+)	No(-)	retained [%]	passing [%]	SPHT3	Symm3	b/l3	PDN
> #16		7.1	100.0	0.748	0.878	0.723	318
#20	#16	9.6	92.9	0.773	0.878	0.712	1115
#30	#20	11.9	83.3	0.796	0.876	0.720	3918
#40	#30	13.3	71.4	0.835	0.882	0.732	12513
#50	#40	16.6	58.1	0.881	0.893	0.744	44669
#60	#50	9.1	41.5	0.900	0.899	0.746	52191
#70	#60	7.7	32.4	0.912	0.903	0.747	73631
#140	#70	20.5	24.7	0.908	0.906	0.744	703422
PAN	#140	4.2	4.2	0.881	0.919	0.722	29948277

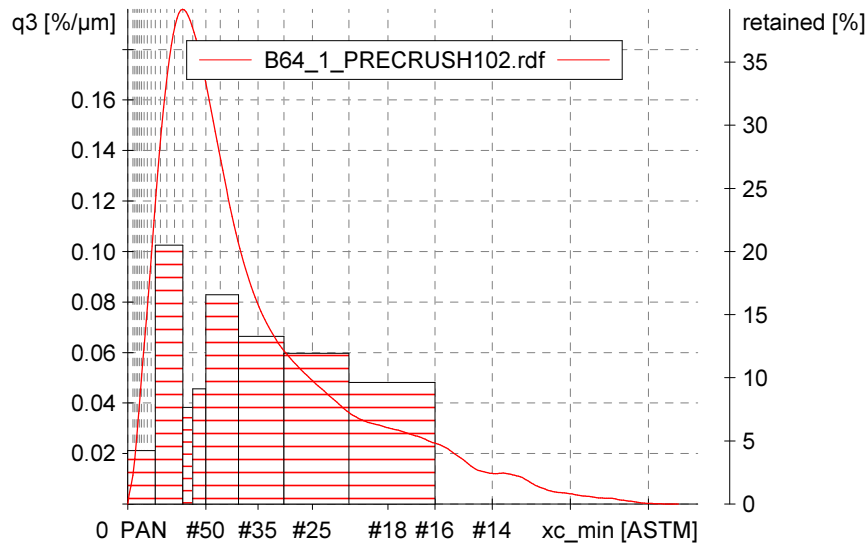

Characteristics

Q3 [%] x [μm]
 10.0 138.8
 50.0 356.4
 90.0 1067.1
 SPAN3 = 2.605
 U3 = 3.210
 Mv3(x) = 486.9 μm
 Sigma3(x) = 370.3 μm

Mean value SPHT3 = 0.851
 Mean value Symm3 = 0.891
 Mean value b/l3 = 0.722
 Mean value RDNS_C3 = 0.422
 Mean value SPHT_K3 = 0.659

User