


BELT_04_SV_15_PRECRUSH

Company:
 User:
 Result file: C:\CamsizerXT\CAMDAT\BELT_04_SV_15_PRECRUSH\BELT_04_SV_15_PRECRUSH049.rdf
 Task file: C:\CamsizerXT\CAMSYS\BELT_04_SV_15_PRECRUSH.afg
 Time: 5/22/2015 , 14:00 , duration 9 min 7 s at 0.5 % covered area, image rate 1:1 , with X-Fall, gap width = 7.0 mm

Particle model: xc_min
 No. of particles: CCD-B = 9019292 , CCD-Z = 131224
 Velocity adaption: no
 Fitting: no

Material:

ASTM(+)	No(-)	retained [%]	passing [%]	SPHT3	Symm3	b/l3	PDN
> #16		20.1	100.0	0.786	0.882	0.674	1367
#20	#16	19.6	79.9	0.807	0.887	0.678	4316
#30	#20	18.1	60.3	0.822	0.890	0.685	10775
#40	#30	13.4	42.2	0.842	0.895	0.696	23017
#50	#40	10.1	28.8	0.864	0.898	0.712	50470
#60	#50	4.2	18.7	0.878	0.901	0.722	46402
#70	#60	3.1	14.5	0.890	0.902	0.731	59014
#140	#70	7.5	11.4	0.888	0.901	0.735	525713
PAN	#140	3.9	3.9	0.886	0.921	0.752	34562239

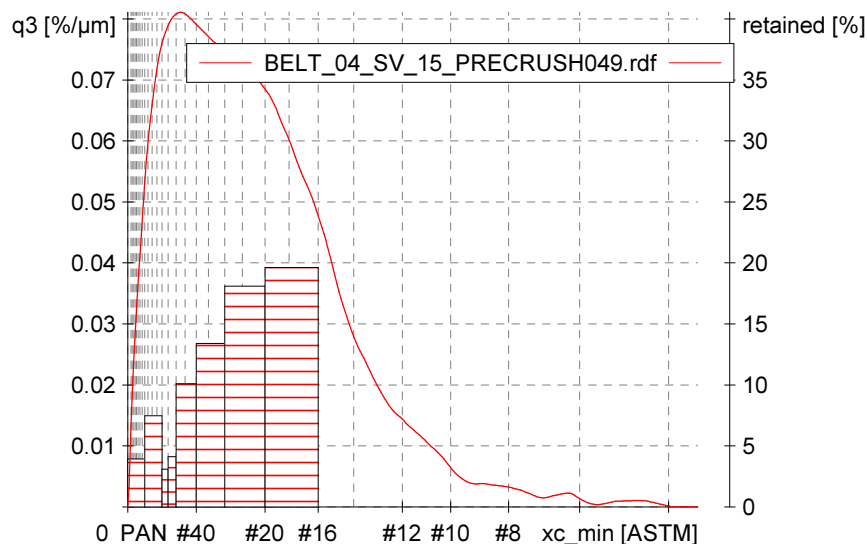

Characteristics

Q3 [%]	x [μm]
10.0	194.0
50.0	705.2
90.0	1473.4
SPAN3 =	1.814
U3 =	4.361
Mv3(x) =	788.1 μm
Sigma3(x) =	527.9 μm

Mean value SPHT3 = 0.824
 Mean value Symm3 = 0.892
 Mean value b/l3 = 0.678
 Mean value RDNS_C3 = 0.384
 Mean value SPHT_K3 = 0.546

User