


DILL_01_SV_14_PRECRUSH

Company:
 User:
 Result file: C:\CamsizerXT\CAMDAT\DILL_01_SV_14_PRECRUSH\DILL_01_SV_14_PRECRUSH024.rdf
 Task file: C:\CamsizerXT\CAMSYS\DILL_01_SV_14_PRECRUSH.afg
 Time: 2/3/2015 , 14:45 , duration 24 min 34 s at 0.5 % covered area, image rate 1:1 , with X-Fall, gap width = 7.0 mm

Particle model: xc_min
 No. of particles: CCD-B = 6472263 , CCD-Z = 66083
 Velocity adaption: no
 Fitting: no

Material:

ASTM(+)	No(-)	retained [%]	passing [%]	SPHT3	Symm3	b/l3	PDN
> #16		8.3	100.0	0.785	0.895	0.727	381
#20	#16	5.8	91.7	0.765	0.881	0.723	1000
#30	#20	4.7	85.9	0.767	0.876	0.727	2315
#40	#30	3.8	81.2	0.800	0.875	0.738	5466
#50	#40	4.6	77.4	0.830	0.870	0.742	19222
#60	#50	5.4	72.8	0.882	0.884	0.761	49210
#70	#60	10.1	67.4	0.906	0.895	0.757	152068
#140	#70	51.5	57.3	0.901	0.902	0.735	2725470
PAN	#140	5.8	5.8	0.858	0.915	0.686	14264862

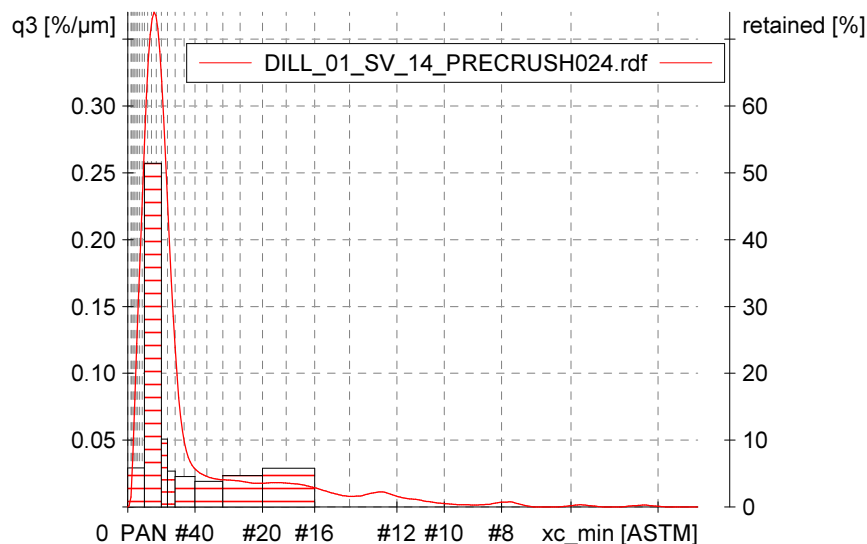

Characteristics

Q3 [%]	x [μm]
10.0	116.2
50.0	194.4
90.0	1075.5
SPAN3 =	4.935
U3 =	1.893
Mv3(x) =	394.2 μm
Sigma3(x) =	478.1 μm

Mean value SPHT3 = 0.862
 Mean value Symm3 = 0.894
 Mean value b/l3 = 0.722
 Mean value RDNS_C3 = 0.422
 Mean value SPHT_K3 = 0.651

User