


WSS_04_SV_14_PRECRUSH

Company:
 User:
 Result file: C:\CamsizerXT\CAMDAT\WSS_04_SV_14_PRECRUSH\WSS_04_SV_14_PRECRUSH042.rdf
 Task file: C:\CamsizerXT\CAMSYS\WSS_04_SV_14_PRECRUSH.afg
 Time: 2/26/2015 , 13:30 , duration 6 min 59 s at 0.5 % covered area, image rate 1:1 , with X-Fall, gap width = 7.0 mm

Particle model: xc_min
 No. of particles: CCD-B = 4042704 , CCD-Z = 50051
 Velocity adaption: no
 Fitting: no

Material:

ASTM(+)	No(-)	retained [%]	passing [%]	SPHT3	Symm3	b/l3	PDN
> #16		4.6	100.0	0.741	0.866	0.696	372
#20	#16	7.2	95.4	0.778	0.870	0.709	1691
#30	#20	14.3	88.2	0.839	0.882	0.736	9584
#40	#30	24.4	73.9	0.879	0.896	0.740	45068
#50	#40	29.0	49.5	0.899	0.904	0.737	143325
#60	#50	10.1	20.5	0.902	0.906	0.723	105857
#70	#60	5.4	10.4	0.901	0.904	0.711	91883
#140	#70	4.8	5.0	0.879	0.899	0.676	193523
PAN	#140	0.2	0.2	0.801	0.893	0.640	9258650

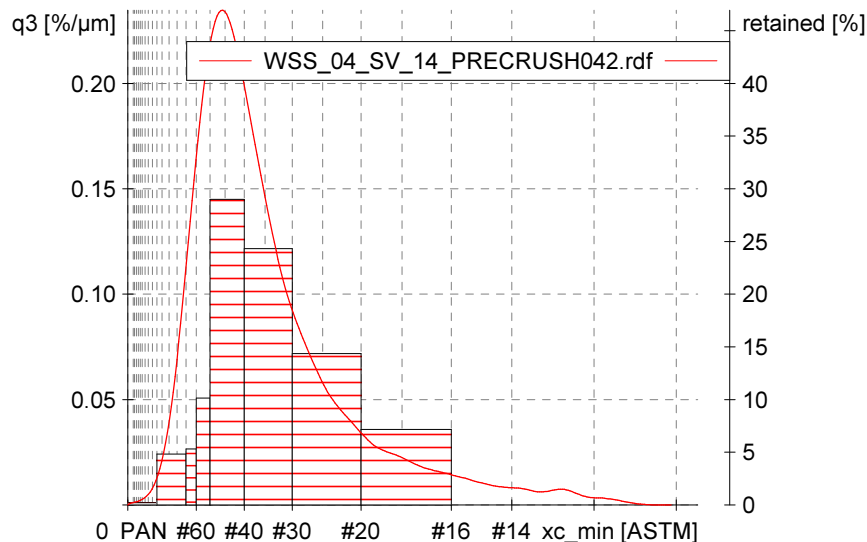

Characteristics

Q3 [%]	x [μm]
10.0	247.7
50.0	427.4
90.0	912.4
SPAN3 =	1.555
U3 =	1.954
Mv3(x) =	513.7 μm
Sigma3(x) =	293.7 μm

Mean value SPHT3 = 0.863
 Mean value Symm3 = 0.894
 Mean value b/l3 = 0.713
 Mean value RDNS_C3 = 0.494
 Mean value SPHT_K3 = 0.633

User