


B60_03_PRECRUSH

Company:
 User:
 Result file: C:\CamsizerXT\CAMDAT\B60_03_PRECRUSH\B60_03_PRECRUSH068.rdf
 Task file: C:\CamsizerXT\CAMSYS\B60_03_PRECRUSH.afg
 Time: 9/15/2015, 9:38, duration 11 min 18 s at 0.5 % covered area, image rate 1:1, with X-Fall, gap width = 7.0 mm

Particle model: xc_min
 No. of particles: CCD-B = 7466932, CCD-Z = 149528
 Velocity adaption: no
 Fitting: no

Material:

ASTM(+)	No(-)	retained [%]	passing [%]	SPHT3	Symm3	b/l3	PDN
> #16		0.2	100.0	0.765	0.886	0.712	6
#20	#16	0.8	99.8	0.757	0.886	0.701	43
#30	#20	1.0	99.0	0.800	0.887	0.741	163
#40	#30	1.9	98.0	0.826	0.883	0.752	922
#50	#40	3.9	96.1	0.855	0.883	0.759	5661
#60	#50	4.8	92.2	0.885	0.889	0.763	14266
#70	#60	7.8	87.4	0.903	0.895	0.760	38440
#140	#70	51.5	79.6	0.907	0.904	0.744	1085957
PAN	#140	28.1	28.1	0.898	0.927	0.731	16979115

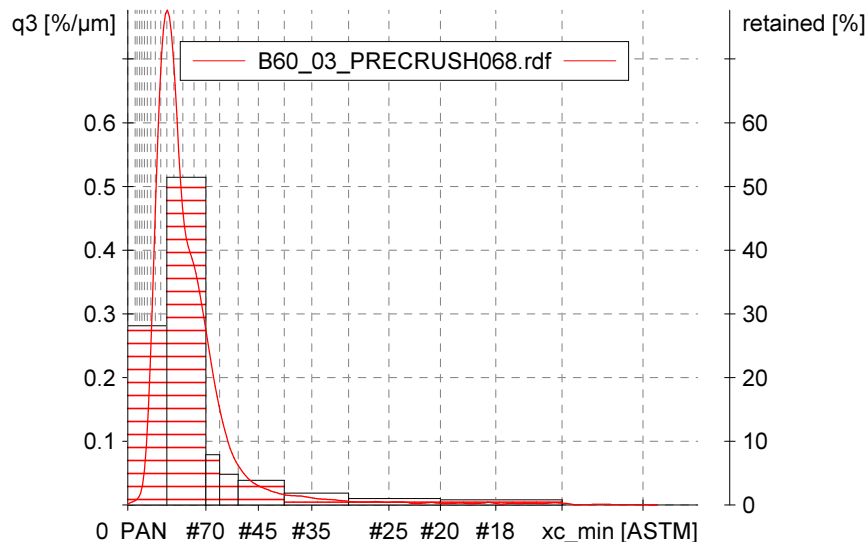

Characteristics

Q3 [%]	x [μm]
10.0	82.2
50.0	135.8
90.0	271.2
SPAN3 =	1.391
U3 =	1.919
Mv3(x) =	172.8 μm
Sigma3(x) =	135.2 μm

Mean value SPHT3 = 0.891
 Mean value Symm3 = 0.906
 Mean value b/l3 = 0.728
 Mean value RDNS_C3 = 0.640
 Mean value SPHT_K3 = 0.654

User