


B63_05_PRECRUSH

Company:
 User:
 Result file: C:\CamsizerXT\CAMDAT\B63_05_PRECRUSH\B63_05_PRECRUSH049.rdf
 Task file: C:\CamsizerXT\CAMSYS\B63_05_PRECRUSH.afg
 Time: 6/17/2015, 15:06, duration 6 min 44 s at 0.5 % covered area, image rate 1:1, with X-Fall, gap width = 7.0 mm

Particle model: xc_min
 No. of particles: CCD-B = 2496507, CCD-Z = 35721
 Velocity adaption: no
 Fitting: no

Material:

ASTM(+)	No(-)	retained [%]	passing [%]	SPHT3	Symm3	b/l3	PDN
> #16		5.1	100.0	0.732	0.866	0.742	533
#20	#16	9.2	94.9	0.767	0.859	0.732	2471
#30	#20	17.0	85.7	0.825	0.869	0.739	12536
#40	#30	29.4	68.7	0.884	0.894	0.743	59804
#50	#40	31.4	39.3	0.912	0.913	0.737	160337
#60	#50	5.9	7.9	0.913	0.917	0.712	63674
#70	#60	1.4	2.0	0.908	0.915	0.692	24626
#140	#70	0.5	0.6	0.888	0.909	0.665	17306
PAN	#140	0.1	0.1	0.823	0.896	0.681	19333442

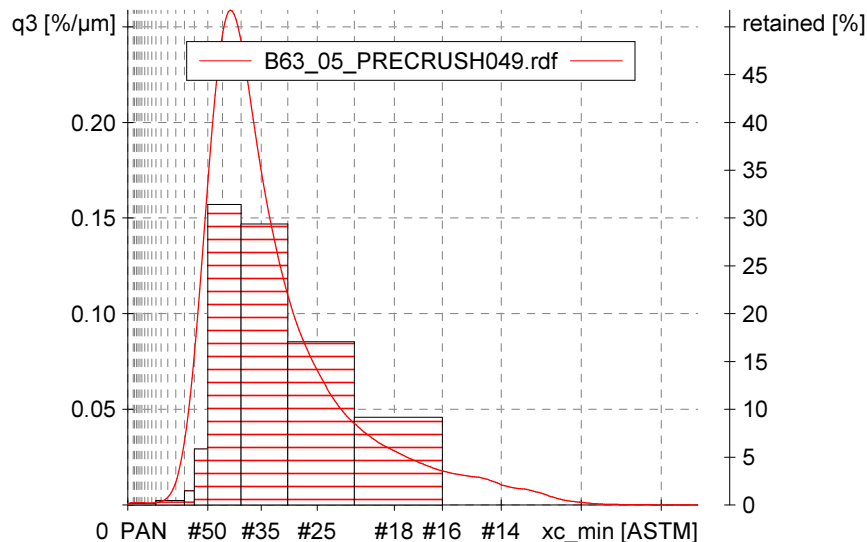

Characteristics

Q3 [%]	x [μm]
10.0	311.4
50.0	472.8
90.0	969.5
SPAN3 =	1.392
U3 =	1.708
Mv3(x) =	563.3 μm
Sigma3(x) =	278.7 μm

Mean value SPHT3 = 0.861
 Mean value Symm3 = 0.891
 Mean value b/l3 = 0.724
 Mean value RDNS_C3 = 0.547
 Mean value SPHT_K3 = 0.664

User