


B63_3_SV_14_PRECRUSH

Company:
 User:
 Result file: C:\CamsizerXT\CAMDAT\B63_3_SV_14_PRECRUSH\B63_3_SV_14_PRECRUSH102.rdf
 Task file: C:\CamsizerXT\CAMSYS\B63_3_SV_14_PRECRUSH.afg
 Time: 6/8/2015 , 13:32 , duration 7 min 2 s at 0.5 % covered area, image rate 1:1 , with X-Fall, gap width = 7.0 mm

Particle model: xc_min
 No. of particles: CCD-B = 1092444 , CCD-Z = 17496
 Velocity adaption: no
 Fitting: no

Material:

ASTM(+)	No(-)	retained [%]	passing [%]	SPHT3	Symm3	b/l3	PDN
> #16		3.1	100.0	0.753	0.870	0.746	270
#20	#16	5.9	96.9	0.783	0.865	0.728	1481
#30	#20	16.7	91.0	0.845	0.879	0.750	11766
#40	#30	34.9	74.3	0.885	0.896	0.747	65566
#50	#40	30.1	39.4	0.898	0.904	0.730	138866
#60	#50	5.8	9.3	0.894	0.902	0.704	58139
#70	#60	2.0	3.5	0.890	0.900	0.688	33857
#140	#70	1.4	1.5	0.860	0.891	0.654	54976
PAN	#140	0.1	0.1	0.764	0.895	0.591	4522408

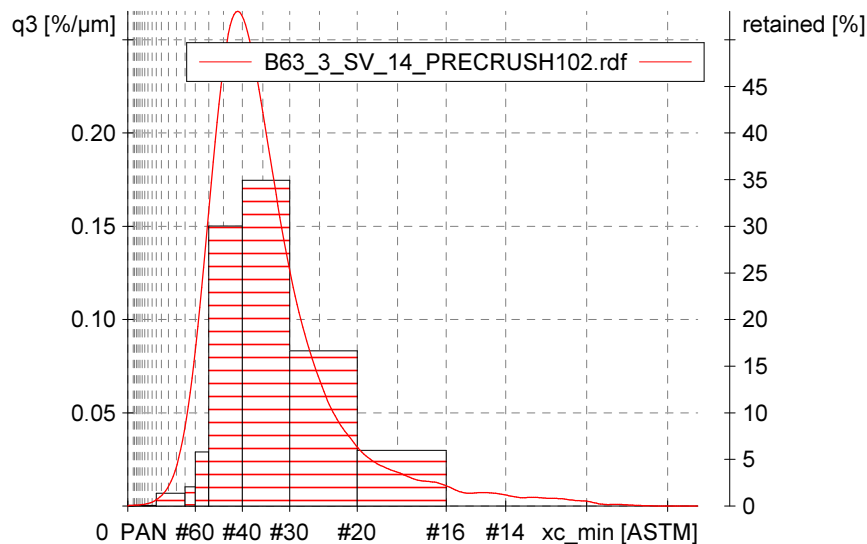

Characteristics

Q3 [%]	x [μm]
10.0	304.0
50.0	466.4
90.0	822.5
SPAN3 =	1.112
U3 =	1.681
Mv3(x) =	527.6 μm
Sigma3(x) =	245.7 μm

Mean value SPHT3 = 0.867
 Mean value Symm3 = 0.892
 Mean value b/l3 = 0.723
 Mean value RDNS_C3 = 0.498
 Mean value SPHT_K3 = 0.661

User