


B63_4_SV_14_PRECRUSH

Company:
 User:
 Result file: C:\CamsizerXT\CAMDAT\B63_4_SV_14_PRECRUSH\B63_4_SV_14_PRECRUSH101.rdf
 Task file: C:\CamsizerXT\CAMSYS\B63_4_SV_14_PRECRUSH.afg
 Time: 6/8/2015, 13:18, duration 5 min 59 s at 0.5 % covered area, image rate 1:1, with X-Fall, gap width = 7.0 mm

Particle model: xc_min
 No. of particles: CCD-B = 773826, CCD-Z = 12063
 Velocity adaption: no
 Fitting: no

Material:

ASTM(+)	No(-)	retained [%]	passing [%]	SPHT3	Symm3	b/l3	PDN
> #16		6.1	100.0	0.740	0.864	0.748	633
#20	#16	12.2	93.9	0.792	0.866	0.743	3387
#30	#20	25.5	81.7	0.851	0.883	0.745	19265
#40	#30	35.6	56.2	0.892	0.904	0.742	69849
#50	#40	18.2	20.6	0.907	0.914	0.727	86839
#60	#50	1.9	2.4	0.904	0.914	0.700	20159
#70	#60	0.4	0.5	0.896	0.911	0.675	6164
#140	#70	0.1	0.1	0.871	0.898	0.642	2704
PAN	#140	0.0	0.0	0.828	0.908	0.726	6380615

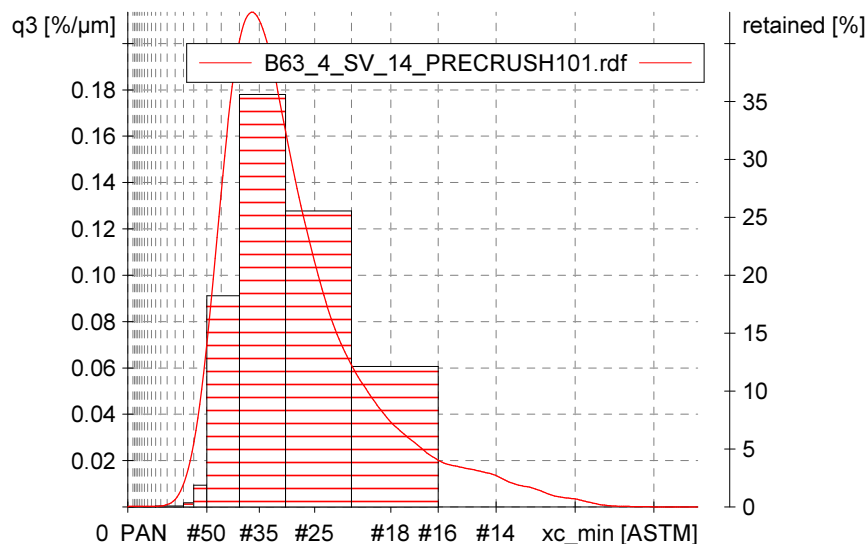

Characteristics

Q3 [%]	x [μm]
10.0	369.5
50.0	563.9
90.0	1034.6
SPAN3 =	1.179
U3 =	1.690
Mv3(x) =	640.2 μm
Sigma3(x) =	278.2 μm

Mean value SPHT3 = 0.858
 Mean value Symm3 = 0.893
 Mean value b/l3 = 0.728
 Mean value RDNS_C3 = 0.481
 Mean value SPHT_K3 = 0.675

User