


B65_05_PRECRUSH

Company:
 User:
 Result file: C:\CamsizerXT\CAMDAT\B65_05_PRECRUSH\B65_05_PRECRUSH039.rdf
 Task file: C:\CamsizerXT\CAMSYS\B65_05_PRECRUSH.afg
 Time: 6/17/2015, 10:04, duration 10 min 22 s at 0.5 % covered area, image rate 1:1, with X-Fall, gap width = 7.0 mm

Particle model: xc_min
 No. of particles: CCD-B = 8590583, CCD-Z = 159066
 Velocity adaption: no
 Fitting: no

Material:

ASTM(+)	No(-)	retained [%]	passing [%]	SPHT3	Symm3	b/l3	PDN
> #16		5.0	100.0	0.734	0.874	0.725	451
#20	#16	6.0	95.0	0.749	0.871	0.715	1358
#30	#20	7.2	89.0	0.783	0.865	0.727	4706
#40	#30	10.3	81.8	0.824	0.864	0.731	19336
#50	#40	23.6	71.5	0.887	0.892	0.747	131076
#60	#50	20.6	47.9	0.916	0.911	0.751	229088
#70	#60	14.3	27.3	0.924	0.915	0.744	254704
#140	#70	12.6	13.0	0.920	0.914	0.732	526762
PAN	#140	0.4	0.4	0.872	0.913	0.707	27822765

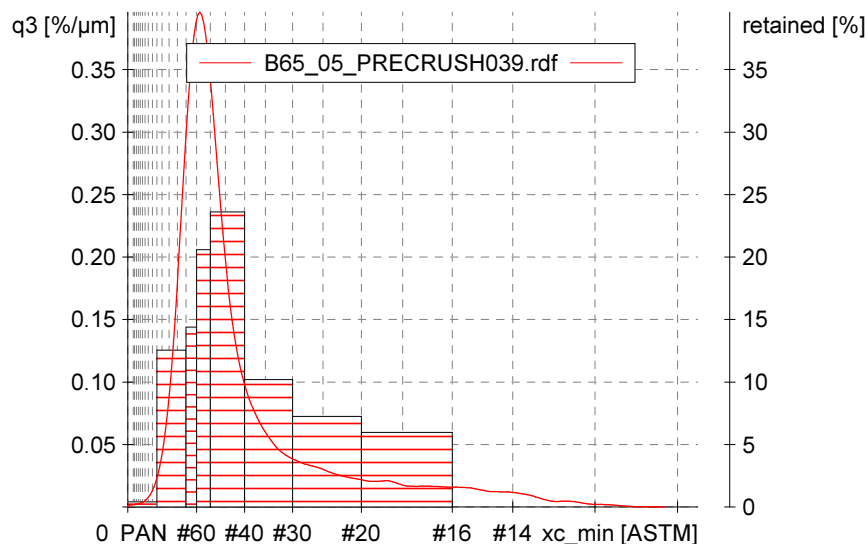

Characteristics

Q3 [%]	x [μm]
10.0	201.6
50.0	306.1
90.0	899.0
SPAN3 = 2.278	
U3 = 1.701	
Mv3(x) = 427.1 μm	
Sigma3(x) = 307.9 μm	

Mean value SPHT3 = 0.867
 Mean value Symm3 = 0.894
 Mean value b/l3 = 0.726
 Mean value RDNS_C3 = 0.455
 Mean value SPHT_K3 = 0.667

User