


B65_06_PRECRUSH

Company:
 User:
 Result file: C:\CamsizerXT\CAMDAT\B65_06_PRECRUSH\B65_06_PRECRUSH145.rdf
 Task file: C:\CamsizerXT\CAMSYS\B65_06_PRECRUSH.afg
 Time: 6/16/2015, 9:59, duration 7 min 11 s at 0.5 % covered area, image rate 1:1, with X-Fall, gap width = 7.0 mm

Particle model: xc_min
 No. of particles: CCD-B = 4479939, CCD-Z = 86071
 Velocity adaption: no
 Fitting: no

Material:

ASTM(+)	No(-)	retained [%]	passing [%]	SPHT3	Symm3	b/l3	PDN
> #16		10.9	100.0	0.750	0.875	0.692	1121
#20	#16	17.8	89.1	0.772	0.875	0.696	4943
#30	#20	21.2	71.3	0.795	0.875	0.696	15798
#40	#30	17.5	50.1	0.821	0.877	0.699	36385
#50	#40	13.5	32.6	0.850	0.882	0.707	80734
#60	#50	6.5	19.1	0.882	0.892	0.723	86088
#70	#60	5.6	12.6	0.904	0.903	0.732	125218
#140	#70	6.8	7.0	0.905	0.908	0.722	365862
PAN	#140	0.2	0.2	0.854	0.906	0.709	18803927

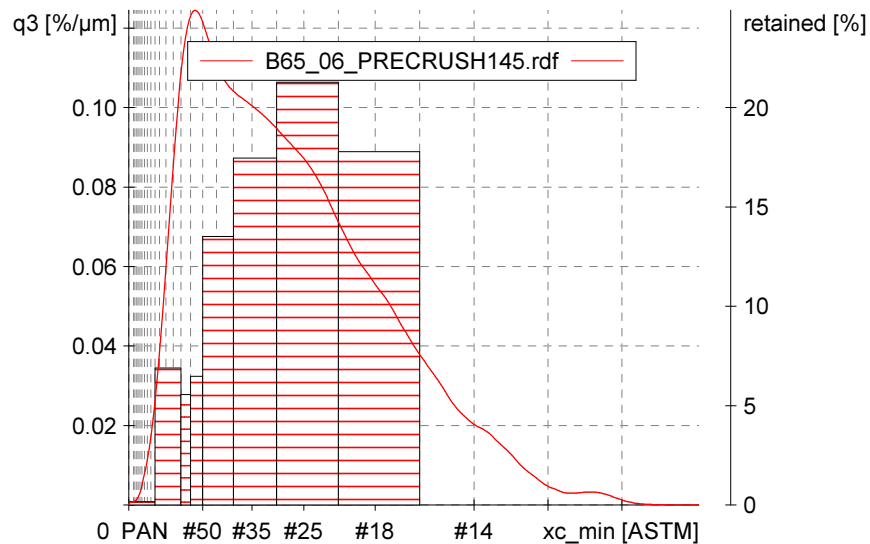

Characteristics

Q3 [%]	x [μm]
10.0	232.1
50.0	599.4
90.0	1203.7
SPAN3 = 1.621	
U3 = 3.056	
Mv3(x) = 665.0 μm	
Sigma3(x) = 375.9 μm	

Mean value SPHT3 = 0.811
 Mean value Symm3 = 0.880
 Mean value b/l3 = 0.687
 Mean value RDNS_C3 = 0.321
 Mean value SPHT_K3 = 0.581

User