


B65_1_SV_14_PRECRUSH

Company:
 User:
 Result file: C:\CamsizerXT\CAMDAT\B65_1_SV_14_PRECRUSH\B65_1_SV_14_PRECRUSH102.rdf
 Task file: C:\CamsizerXT\CAMSYS\B65_1_SV_14_PRECRUSH.afg
 Time: 6/8/2015 , 12:34 , duration 15 min 3 s at 0.5 % covered area, image rate 1:1 , with X-Fall, gap width = 7.0 mm

Particle model: xc_min
 No. of particles: CCD-B = 9569441 , CCD-Z = 73913
 Velocity adaption: no
 Fitting: no

Material:

ASTM(+)	No(-)	retained [%]	passing [%]	SPHT3	Symm3	b/l3	PDN
> #16		12.3	100.0	0.787	0.896	0.739	296
#20	#16	7.3	87.7	0.808	0.897	0.713	514
#30	#20	5.8	80.4	0.824	0.896	0.727	1129
#40	#30	4.5	74.6	0.849	0.896	0.740	2639
#50	#40	4.9	70.1	0.876	0.897	0.756	8401
#60	#50	3.3	65.2	0.899	0.899	0.768	12659
#70	#60	4.7	61.9	0.918	0.906	0.773	30192
#140	#70	37.8	57.2	0.913	0.914	0.762	1039642
PAN	#140	19.4	19.4	0.891	0.930	0.756	20187944

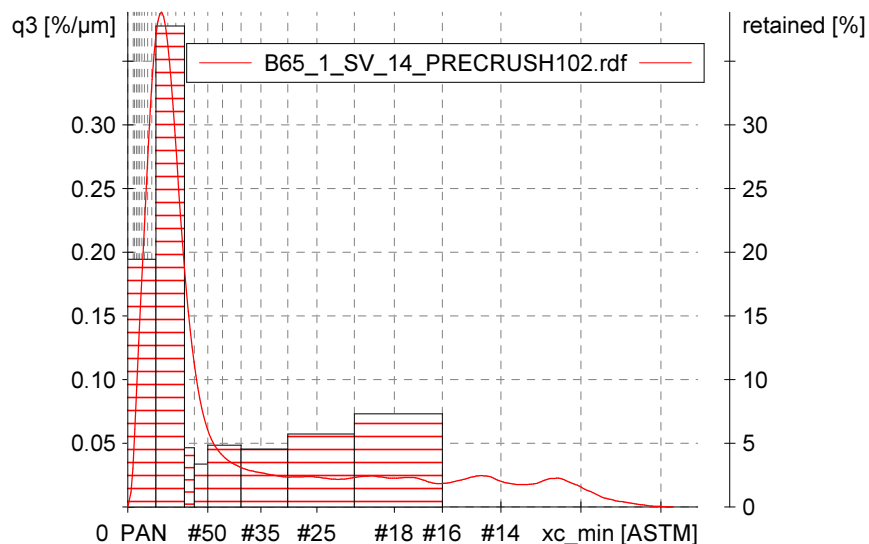

Characteristics

Q3 [%]	x [μm]
10.0	86.7
50.0	178.8
90.0	1292.7
SPAN3 = 6.746	
U3 = 2.671	
Mv3(x) = 430.0 μm	
Sigma3(x) = 476.6 μm	

Mean value SPHT3 = 0.873
 Mean value Symm3 = 0.909
 Mean value b/l3 = 0.743
 Mean value RDNS_C3 = 0.531
 Mean value SPHT_K3 = 0.693

User