


B66_02_SV_14_PRECRUSH

Company:
 User:
 Result file: C:\CamsizerXT\CAMDAT\B66_02_SV_14_PRECRUSH\B66_02_SV_14_PRECRUSH149.rdf
 Task file: C:\CamsizerXT\CAMSYS\B66_02_SV_14_PRECRUSH.afg
 Time: 6/16/2015 , 13:12 , duration 8 min 40 s at 0.5 % covered area, image rate 1:1 , with X-Fall, gap width = 7.0 mm

Particle model: xc_min
 No. of particles: CCD-B = 2128056 , CCD-Z = 32720
 Velocity adaption: no
 Fitting: no

Material:

ASTM(+)	No(-)	retained [%]	passing [%]	SPHT3	Symm3	b/l3	PDN
> #16		1.6	100.0	0.742	0.879	0.736	138
#20	#16	2.9	98.4	0.731	0.867	0.729	636
#30	#20	4.3	95.5	0.759	0.857	0.735	2760
#40	#30	7.9	91.2	0.798	0.852	0.733	14174
#50	#40	21.9	83.3	0.872	0.878	0.742	113609
#60	#50	23.0	61.4	0.908	0.901	0.742	236788
#70	#60	20.0	38.4	0.916	0.908	0.729	323744
#140	#70	18.3	18.4	0.904	0.908	0.698	607046
PAN	#140	0.1	0.1	0.845	0.912	0.640	5497448

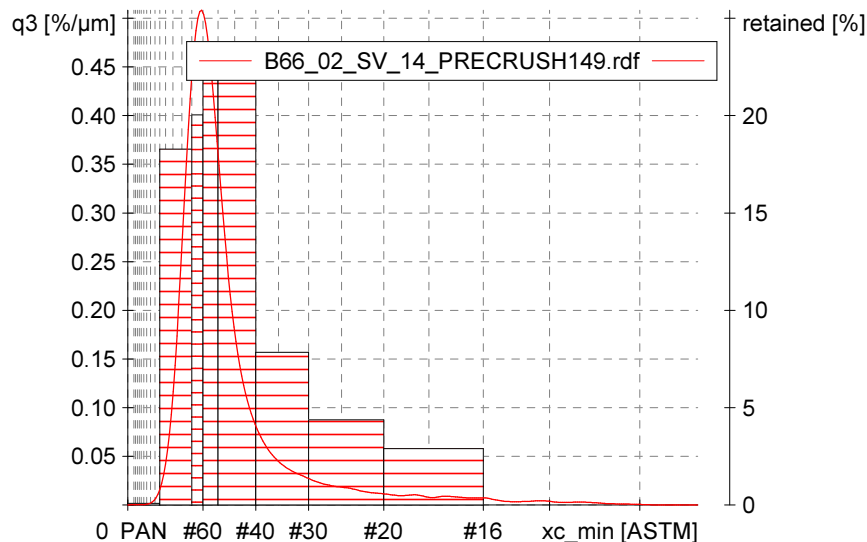

Characteristics

Q3 [%]	x [μm]
10.0	191.4
50.0	272.7
90.0	562.0
SPAN3 =	1.359
U3 =	1.548
Mv3(x) =	339.6 μm
Sigma3(x) =	216.0 μm

Mean value SPHT3 = 0.871
 Mean value Symm3 = 0.890
 Mean value b/l3 = 0.715
 Mean value RDNS_C3 = 0.497
 Mean value SPHT_K3 = 0.637

User