


BELT_05_SV_14_PRECRUSH

Company:
 User:
 Result file: C:\CamsizerXT\CAMDAT\BELT_05_SV_14_PRECRUSH\BELT_05_SV_14_PRECRUSH067.rdf
 Task file: C:\CamsizerXT\CAMSYS\BELT_05_SV_14_PRECRUSH.afg
 Time: 5/22/2015, 11:22, duration 10 min 29 s at 0.5 % covered area, image rate 1:1, with X-Fall, gap width = 7.0 mm

Particle model: xc_min
 No. of particles: CCD-B = 4373581, CCD-Z = 0
 Velocity adaption: no
 Fitting: no

Material:

ASTM(+)	No(-)	retained [%]	passing [%]	SPHT3	Symm3	b/l3	PD0
> #16		8.6	100.0	0.764	0.879	0.693	300
#20	#16	15.1	91.4	0.778	0.881	0.680	1434
#30	#20	17.6	76.3	0.794	0.879	0.681	4522
#40	#30	14.7	58.7	0.814	0.879	0.687	10639
#50	#40	12.3	44.0	0.840	0.882	0.699	25708
#60	#50	5.9	31.7	0.862	0.885	0.709	26866
#70	#60	5.1	25.8	0.879	0.889	0.717	40493
#140	#70	16.9	20.7	0.907	0.895	0.728	509333
PAN	#140	3.8	3.8	0.941	0.897	0.732	3754286

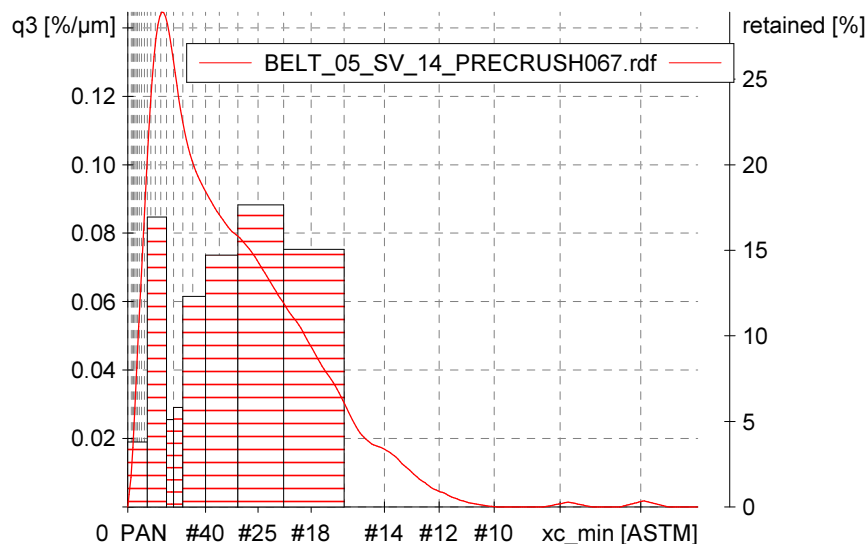

Characteristics

Q3 [%]	x [μm]
10.0	146.6
50.0	493.5
90.0	1139.1
SPAN3 =	2.011
U3 =	4.202
Mv3(x) =	580.2 μm
Sigma3(x) =	407.2 μm

Mean value SPHT3 = 0.820
 Mean value Symm3 = 0.883
 Mean value b/l3 = 0.680
 Mean value RDNS_C3 = 0.308
 Mean value SPHT_K3 = 0.562

User