


BELT_06_SV_14_PRECRUSH

Company:
 User:
 Result file: C:\CamsizerXT\CAMDAT\BELT_06_SV_14_PRECRUSH\BELT_06_SV_14_PRECRUSH066.rdf
 Task file: C:\CamsizerXT\CAMSYS\BELT_06_SV_14_PRECRUSH.afg
 Time: 5/22/2015, 11:07, duration 11 min 12 s at 0.5 % covered area, image rate 1:1, with X-Fall, gap width = 7.0 mm

Particle model: xc_min
 No. of particles: CCD-B = 10995295, CCD-Z = 0
 Velocity adaption: no
 Fitting: no

Material:

ASTM(+)	No(-)	retained [%]	passing [%]	SPHT3	Symm3	b/l3	PD0
> #16		10.4	100.0	0.766	0.882	0.705	346
#20	#16	14.9	89.6	0.780	0.880	0.693	1458
#30	#20	16.5	74.7	0.794	0.883	0.691	4342
#40	#30	13.2	58.2	0.814	0.883	0.694	9612
#50	#40	10.4	45.0	0.840	0.886	0.711	22399
#60	#50	4.8	34.6	0.860	0.887	0.722	22936
#70	#60	4.1	29.8	0.876	0.890	0.729	33540
#140	#70	13.8	25.7	0.898	0.890	0.734	454415
PAN	#140	11.9	11.9	0.943	0.891	0.740	10446247

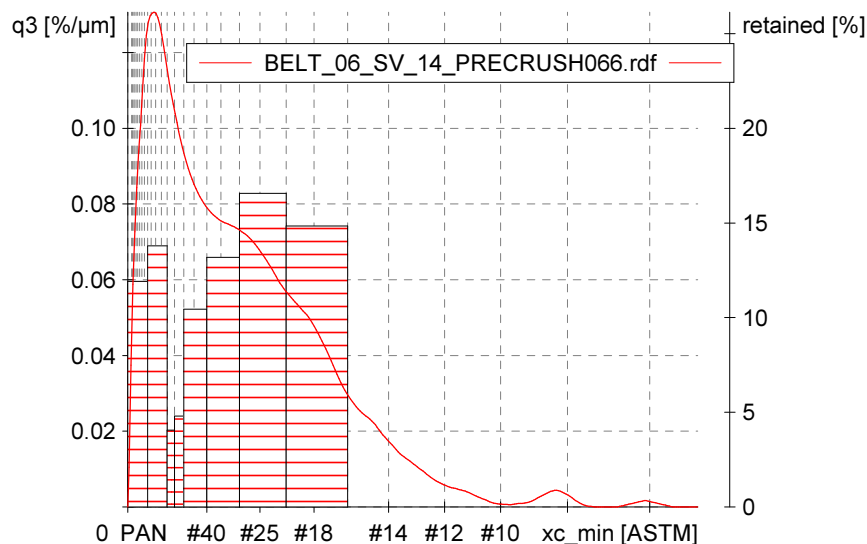

Characteristics

Q3 [%]	x [μm]
10.0	93.0
50.0	491.2
90.0	1195.6
SPAN3 =	2.245
U3 =	6.731
Mv3(x) =	584.6 μm
Sigma3(x) =	458.7 μm

Mean value SPHT3 = 0.816
 Mean value Symm3 = 0.884
 Mean value b/l3 = 0.692
 Mean value RDNS_C3 = 0.309
 Mean value SPHT_K3 = 0.589

User