


BELT_09_SV_14_PRECRUSH

Company:
 User:
 Result file: C:\CamsizerXT\CAMDAT\BELT_09_SV_14_PRECRUSH\BELT_09_SV_14_PRECRUSH093.rdf
 Task file: C:\CamsizerXT\CAMSYS\BELT_09_SV_14_PRECRUSH.afg
 Time: 5/21/2015, 11:08, duration 7 min 49 s at 0.5 % covered area, image rate 1:1, with X-Fall, gap width = 7.0 mm

Particle model: xc_min
 No. of particles: CCD-B = 3392357, CCD-Z = 0
 Velocity adaption: no
 Fitting: no

Material:

ASTM(+)	No(-)	retained [%]	passing [%]	SPHT3	Symm3	b/l3	PD0
> #16		2.2	100.0	0.705	0.871	0.699	98
#20	#16	2.7	97.8	0.730	0.862	0.704	455
#30	#20	5.1	95.1	0.767	0.860	0.715	2416
#40	#30	9.9	90.0	0.815	0.861	0.730	13551
#50	#40	28.1	80.1	0.882	0.890	0.743	109793
#60	#50	19.2	52.0	0.904	0.903	0.737	147515
#70	#60	12.7	32.8	0.910	0.906	0.731	159072
#140	#70	19.0	20.1	0.920	0.906	0.732	689533
PAN	#140	1.1	1.1	0.931	0.896	0.715	2269924

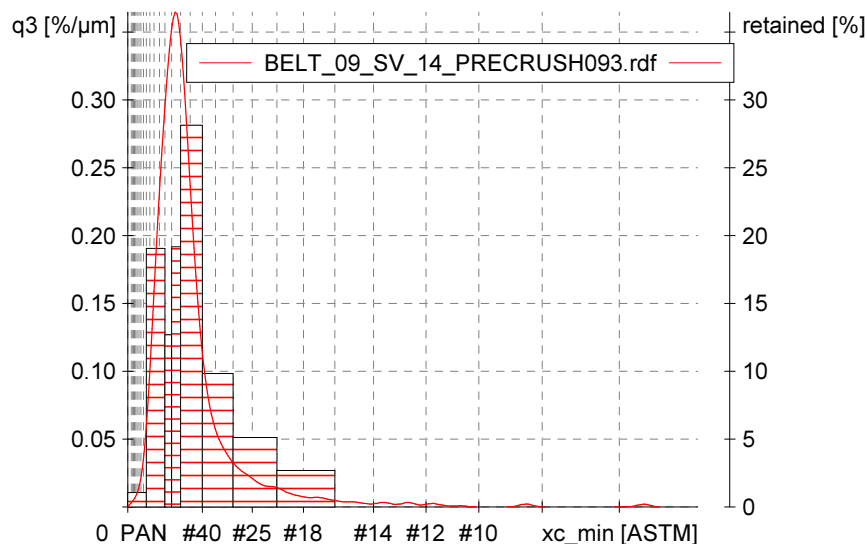

Characteristics

Q3 [%]	x [μm]
10.0	173.1
50.0	294.5
90.0	600.3
SPAN3 = 1.450	
U3 = 1.869	
Mv3(x) = 362.5 μm	
Sigma3(x) = 271.0 μm	

Mean value SPHT3 = 0.870
 Mean value Symm3 = 0.891
 Mean value b/l3 = 0.718
 Mean value RDNS_C3 = 0.453
 Mean value SPHT_K3 = 0.648

User