


C_05_PRECRUSH

Company:
 User:
 Result file: C:\CamsizerXT\CAMDAT\C_05_PRECRUSH\C_05_PRECRUSH196.rdf
 Task file: C:\CamsizerXT\CAMSYS\C_05_PRECRUSH.afg
 Time: 6/29/2015, 9:44, duration 10 min 8 s at 0.5 % covered area, image rate 1:1, with X-Fall, gap width = 7.0 mm

Particle model: xc_min
 No. of particles: CCD-B = 35400433, CCD-Z = 601090
 Velocity adaption: no
 Fitting: no

Material:

ASTM(+)	No(-)	retained [%]	passing [%]	SPHT3	Symm3	b/l3	PDN
> #16		16.5	100.0	0.779	0.878	0.668	718
#20	#16	16.7	83.5	0.791	0.875	0.670	2408
#30	#20	17.2	66.8	0.801	0.877	0.665	6672
#40	#30	14.1	49.6	0.814	0.879	0.659	14872
#50	#40	10.6	35.5	0.831	0.883	0.663	32256
#60	#50	4.4	24.9	0.847	0.887	0.668	29245
#70	#60	3.3	20.5	0.862	0.890	0.677	38264
#140	#70	10.5	17.2	0.878	0.899	0.696	496772
PAN	#140	6.7	6.7	0.893	0.920	0.736	95033450

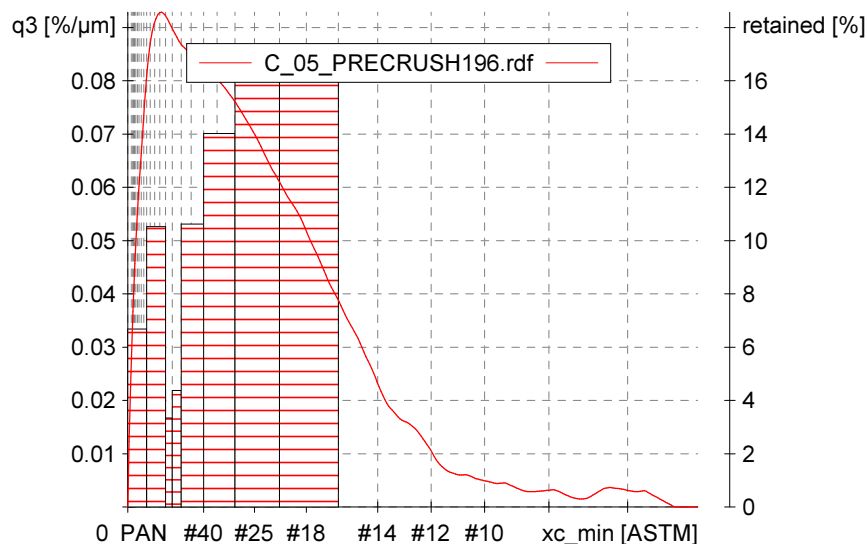

Characteristics

Q3 [%]	x [μm]
10.0	135.2
50.0	605.9
90.0	1384.9
SPAN3 =	2.063
U3 =	5.502
Mv3(x) =	712.9 μm
Sigma3(x) =	535.3 μm

Mean value SPHT3 = 0.810
 Mean value Symm3 = 0.883
 Mean value b/l3 = 0.654
 Mean value RDNS_C3 = 0.308
 Mean value SPHT_K3 = 0.499

User