


DILL_02_SV_14_PRECRUSH

Company:
 User:
 Result file: C:\CamsizerXT\CAMDAT\DILL_02_SV_14_PRECRUSH\DILL_02_SV_14_PRECRUSH025.rdf
 Task file: C:\CamsizerXT\CAMSYS\DILL_02_SV_14_PRECRUSH.afg
 Time: 2/5/2015 , 12:22 , duration 5 min 32 s at 0.5 % covered area, image rate 1:1 , with X-Fall, gap width = 7.0 mm

Particle model: xc_min
 No. of particles: CCD-B = 3651393 , CCD-Z = 57215
 Velocity adaption: no
 Fitting: no

Material:

ASTM(+)	No(-)	retained [%]	passing [%]	SPHT3	Symm3	b/l3	PDN
> #16		3.1	100.0	0.748	0.876	0.740	113
#20	#16	3.1	96.9	0.760	0.869	0.713	295
#30	#20	3.3	93.8	0.792	0.866	0.714	815
#40	#30	4.9	90.5	0.851	0.877	0.747	4137
#50	#40	24.8	85.6	0.913	0.906	0.766	58761
#60	#50	19.3	60.8	0.918	0.909	0.748	85920
#70	#60	14.0	41.5	0.921	0.910	0.741	103564
#140	#70	26.0	27.5	0.914	0.908	0.731	567613
PAN	#140	1.5	1.5	0.861	0.912	0.677	14119605

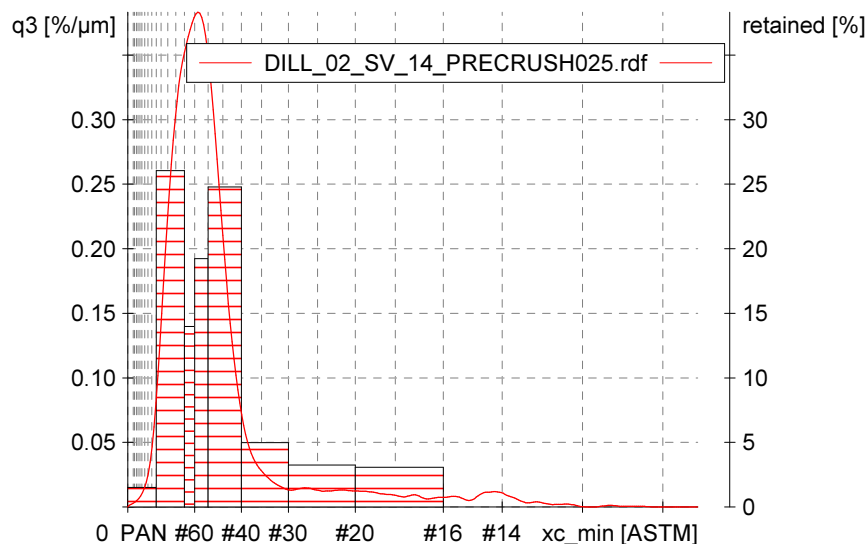

Characteristics

Q3 [%]	x [μm]
10.0	156.9
50.0	271.7
90.0	563.3
SPAN3 =	1.496
U3 =	1.898
Mv3(x) =	338.6 μm
Sigma3(x) =	258.1 μm

Mean value SPHT3 = 0.893
 Mean value Symm3 = 0.902
 Mean value b/l3 = 0.731
 Mean value RDNS_C3 = 0.575
 Mean value SPHT_K3 = 0.667

User