


ELL_01_SV_14_PRECRUSH

Company:
 User:
 Result file: C:\CamsizerXT\CAMDAT\ELL_01_SV_14_PRECRUSH\ELL_01_SV_14_PRECRUSH067.rdf
 Task file: C:\CamsizerXT\CAMSYS\ELL_01_SV_14_PRECRUSH.afg
 Time: 6/23/2015 , 16:32 , duration 7 min 27 s at 0.5 % covered area, image rate 1:1 , with X-Fall, gap width = 7.0 mm

Particle model: xc_min
 No. of particles: CCD-B = 3533971 , CCD-Z = 52787
 Velocity adaption: no
 Fitting: no

Material:

ASTM(+)	No(-)	retained [%]	passing [%]	SPHT3	Symm3	b/l3	PDN
> #16		11.7	100.0	0.768	0.864	0.693	1071
#20	#16	17.1	88.3	0.780	0.868	0.676	4103
#30	#20	20.6	71.2	0.807	0.874	0.681	13395
#40	#30	18.2	50.6	0.827	0.879	0.680	32414
#50	#40	13.9	32.4	0.841	0.881	0.675	69200
#60	#50	5.5	18.5	0.848	0.883	0.668	59389
#70	#60	3.9	13.0	0.858	0.886	0.669	72074
#140	#70	8.1	9.1	0.852	0.890	0.658	467014
PAN	#140	1.0	1.0	0.791	0.898	0.602	12861380

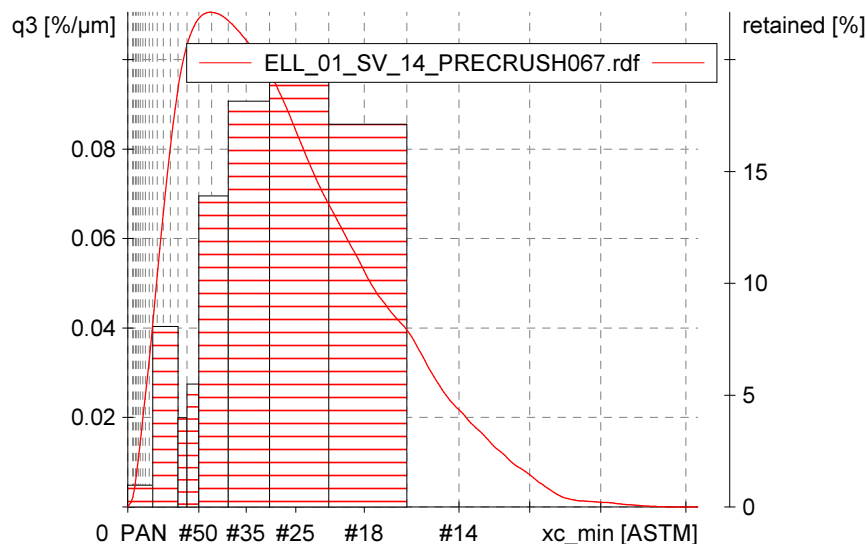

Characteristics

Q3 [%]	x [μm]
10.0	221.2
50.0	593.9
90.0	1219.1
SPAN3 = 1.680	
U3 = 3.172	
Mv3(x) = 664.9 μm	
Sigma3(x) = 384.5 μm	

Mean value SPHT3 = 0.803
 Mean value Symm3 = 0.875
 Mean value b/l3 = 0.654
 Mean value RDNS_C3 = 0.285
 Mean value SPHT_K3 = 0.508

User