


ELL_05_SV_14_PRECRUSH

Company:
 User:
 Result file: C:\CamsizerXT\CAMDAT\ELL_05_SV_14_PRECRUSH\ELL_05_SV_14_PRECRUSH083.rdf
 Task file: C:\CamsizerXT\CAMSYS\ELL_05_SV_14_PRECRUSH.afg
 Time: 5/21/2015 , 10:18 , duration 8 min 56 s at 0.5 % covered area, image rate 1:1 , with X-Fall, gap width = 7.0 mm

Particle model: xc_min
 No. of particles: CCD-B = 6250578 , CCD-Z = 0
 Velocity adaption: no
 Fitting: no

Material:

ASTM(+)	No(-)	retained [%]	passing [%]	SPHT3	Symm3	b/l3	PD0
> #16		3.3	100.0	0.693	0.867	0.673	187
#20	#16	4.4	96.7	0.745	0.871	0.687	727
#30	#20	7.3	92.3	0.767	0.869	0.702	3253
#40	#30	9.5	85.0	0.803	0.867	0.710	11985
#50	#40	14.8	75.5	0.848	0.875	0.727	56475
#60	#50	14.4	60.7	0.885	0.891	0.740	114300
#70	#60	16.2	46.3	0.901	0.899	0.738	212061
#140	#70	27.0	30.1	0.906	0.898	0.720	969852
PAN	#140	3.1	3.1	0.920	0.888	0.700	4881737

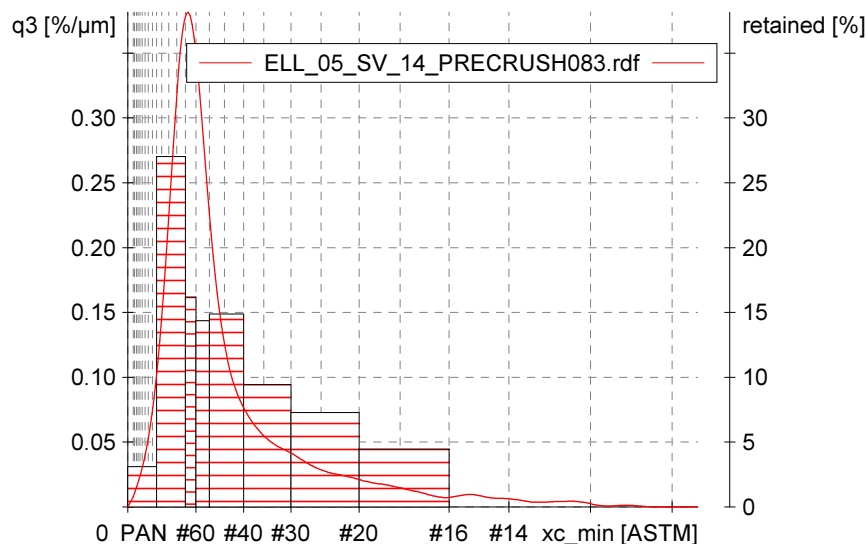

Characteristics

Q3 [%]	x [μm]
10.0	154.3
50.0	260.4
90.0	755.6
SPAN3 = 2.310	
U3 = 1.924	
Mv3(x) = 367.7 μm	
Sigma3(x) = 288.3 μm	

Mean value SPHT3 = 0.852
 Mean value Symm3 = 0.885
 Mean value b/l3 = 0.706
 Mean value RDNS_C3 = 0.321
 Mean value SPHT_K3 = 0.623

User