


ENN_04_SV_14_PRECRUSH

Company:
 User:
 Result file: C:\CamsizerXT\CAMDAT\ENN_04_SV_14_PRECRUSH\ENN_04_SV_14_PRECRUSH055.rdf
 Task file: C:\CamsizerXT\CAMSYS\ENN_04_SV_14_PRECRUSH.afg
 Time: 5/22/2015, 14:53, duration 10 min 8 s at 0.5 % covered area, image rate 1:1, with X-Fall, gap width = 7.0 mm

Particle model: xc_min
 No. of particles: CCD-B = 4071523, CCD-Z = 74713
 Velocity adaption: no
 Fitting: no

Material:

ASTM(+)	No(-)	retained [%]	passing [%]	SPHT3	Symm3	b/l3	PDN
> #16		7.5	100.0	0.724	0.874	0.701	305
#20	#16	6.5	92.5	0.723	0.869	0.678	806
#30	#20	7.4	86.0	0.763	0.867	0.699	2627
#40	#30	7.9	78.6	0.800	0.866	0.716	8107
#50	#40	12.5	70.7	0.857	0.879	0.738	39747
#60	#50	12.8	58.2	0.899	0.897	0.751	82707
#70	#60	13.5	45.4	0.913	0.905	0.747	143129
#140	#70	29.7	31.9	0.909	0.908	0.736	968812
PAN	#140	2.2	2.2	0.868	0.922	0.705	13636446

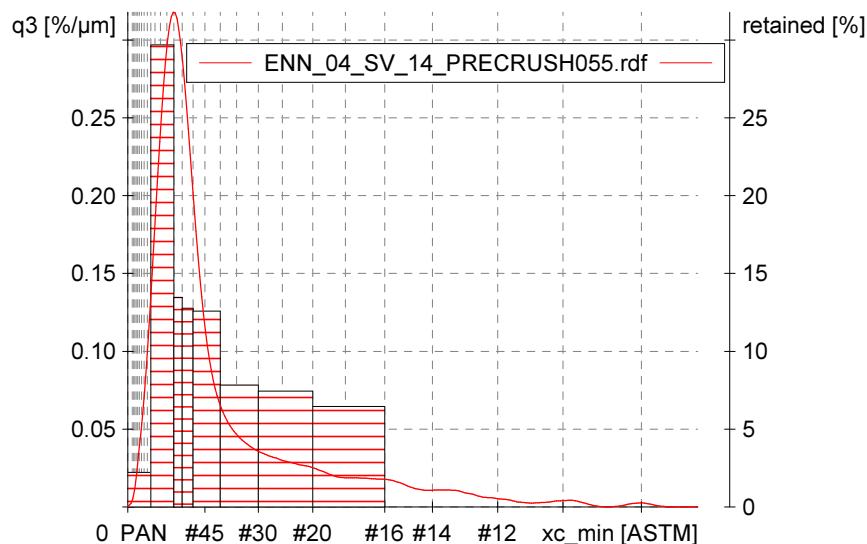

Characteristics

Q3 [%]	x [μm]
10.0	146.0
50.0	265.3
90.0	1043.4
SPAN3 = 3.383	
U3 = 2.129	
Mv3(x) = 435.6 μm	
Sigma3(x) = 402.5 μm	

Mean value SPHT3 = 0.850
 Mean value Symm3 = 0.890
 Mean value b/l3 = 0.715
 Mean value RDNS_C3 = 0.382
 Mean value SPHT_K3 = 0.640

User